


RMCS-3045 NEMA23 19KGCM LEAD SCREW HYBRID LINEAR STEPPER MOTORS

General Specifications		Electrical Specifications	
Number Of Phase	2	Rated Voltage	12 V
Insulation Class	Class B	Rated Current	2.8 A
Step Angle	1.8	Resistance Per Phase	1.13 ohm
Rotor Inertia	57 G.cm2	Inductance per Phase	3.6 mH
Lead Wire	4	Holding Torque	189 Ncm
Lead Screw Type	One Start	Wiring Specifications	
Lead Screw Pitch	2 mm	A+	Red
Motor Weight	200g	A-	Blue
		B+	Green
		B-	Black

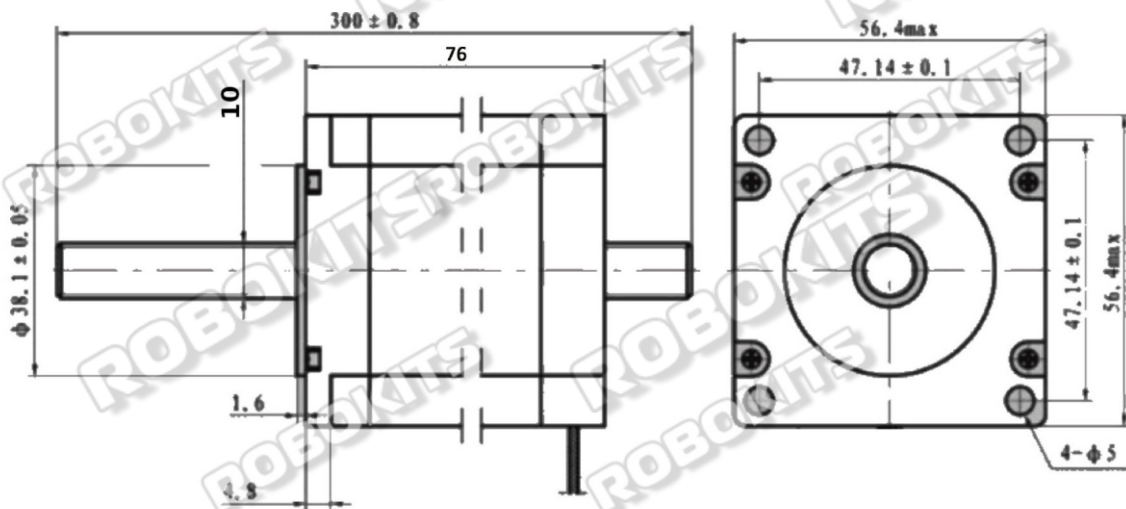

RHINO